

CKS



DIESEL SERVICE





INTERNATIONAL®

October 24, 2016

Prepared For:
Town of Plum Lake
Gary Schmidt
PO Box 280
Sayner, WI 54560-0280
(715)892 - 0583
Reference ID: N/A

Presented By:
MEYER SALES COMPANY INC
Tim Meyer
600 N. 1ST ST.
CAMERON WI 54822 -
(715)458-2838

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2017 7500 SFA 4X2 (SA537)

APPLICATION: Front Plow and Underbelly Scraper with Spreader
MISSION: Requested GVWR: 43000. Calc. GVWR: 43000
Calc. Start / Grade Ability: 29.89% / 3.22% @ 55 MPH
Calc. Geared Speed: 67.1 MPH
DIMENSION: Wheelbase: 171.00, CA: 96.00, Axle to Frame: 75.00
ENGINE, DIESEL: {Navistar N10} EPA 2010, SCR, 350 HP @ 2000 RPM, 1150 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 350 Peak HP (Max)
TRANSMISSION, AUTOMATIC: {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
CLUTCH: Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING: {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, SINGLE: {Meritor RS-23-161} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 6.14
CAB: Conventional
TIRE, FRONT: (2) 315/80R22.5 Load Range L G289 WHA (GOODYEAR), 484 rev/mile, 68 MPH, All-Position
TIRE, REAR: (4) 11R22.5 Load Range H UNISTEEL G177 (GOODYEAR), 493 rev/mile, 68 MPH, Drive
SUSPENSION, REAR, AIR, SINGLE: {Hendrickson PRIMAAX EX} 23,000-lb Capacity, 9.0" Ride Height, With Shock Absorbers
FRAME REINFORCEMENT: Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312"; (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL
PAINT: Cab schematic 100GM
Location 1: 2303, Red (Std)
Chassis schematic N/A

<u>Code</u>	<u>Description</u>
SA53700	Base Chassis, Model 7500 SFA 4X2 with 171.00 Wheelbase, 96.00 CA, and 75.00 Axle to Frame.
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL
1GBP	FRAME REINFORCEMENT Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312"; (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL
1LLA	BUMPER, FRONT Steel, Swept Back <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WDT	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille, With Outer "C" Channel Reinforcement
1WEV	WHEELBASE RANGE 146" (370cm) Through and Including 195" (495cm)
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
3AGA	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 20,000-lb Capacity; With Shock Absorbers <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4 <u>Notes</u> : Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 SqIn Long Stroke Brake Chambers <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4732	DRAIN VALVE (Berg) Manual; With Pull Chain, for Air Tank

<u>Code</u>	<u>Description</u>
	: AIR DRYER LOCATION Inside Left Rail, Back of Cab
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake
	<u>Notes</u>
	: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
4SBC	AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity
4VHZ	AIR TANK LOCATION (2) Mounted Under Cab, Outside Left Rail, on Step Bracket, with Ground Clearance
5708	STEERING COLUMN Tilting
5CAL	STEERING WHEEL 2-Spoke, 18" Dia., Black
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
7BKE	EXHAUST SYSTEM Switchback Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; Includes Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab, for Improved Ground Clearance
7SDM	ENGINE EXHAUST BRAKE for Navistar N9/10 I6 Engines; Electronically Activated
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: FUSES, ELECTRICAL SAE Blade-Type
	: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels
	: JUMP START STUD Located on Positive Terminal of Outermost Battery
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: RUNNING LIGHT (2) Daytime, Included With Headlights
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8518	CIGAR LIGHTER Includes Ash Cup
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord
8GGN	ALTERNATOR {Bosch LH160} Brush Type, 12 Volt 160 Amp. Capacity, Pad Mount
8HAU	BODY BUILDER WIRING INSIDE CAB; Includes Sealed Connectors for Tail/Amber, Turn/Marker/Backup/Accessory, Power/Ground, and Stop/Turn

<u>Code</u>	<u>Description</u>
	: SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior
8TNP	AUXILIARY HARNESS 5.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8VAY	HORN, ELECTRIC Disc Style
8VUJ	BATTERY BOX Steel With Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Right Side Back of Cab
8WCL	HORN, AIR Black, Single Trumpet, Air Solenoid Operated
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WTJ	SWITCH, BODY CIRCUITS, REAR for Bodybuilder; With 6 Switches in Instrument Panel (2-position switches); One Power Module, With 6 Channels, 20 Amp per Channel and 80 Amp Max Output, Switches Control the Power Modules Through Multiplex Wiring, Mounted at Rear of Frame
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
9585	FENDER EXTENSIONS Rubber
9HAN	INSULATION, UNDER HOOD for Sound Abatement
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WAC	BUG SCREEN Front End; Mounted Behind Grille
9WBC	FRONT END Tilting, Fiberglass, With Three Piece Construction; for WorkStar
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GM"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10UAD	VEHICLE REGISTRATION IDENTITY ID for 49 States, Excluding California
11001	CLUTCH Omit Item (Clutch & Control)
12640	ANTI-FREEZE Red, Extended Life Coolant; To -34 Degrees F/ -36.7 Degrees C, Freeze Protection
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted
12959	BLOCK HEATER, ENGINE {Phillips} 120V/1250W
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door

<u>Code</u>	<u>Description</u>
	: ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted : GOVERNOR Electronic : OIL FILTER, ENGINE Spin-On Type : WET TYPE CYLINDER SLEEVES
12THZ	FAN DRIVE {Horton Drivemaster Polar Extreme} Direct Drive Type, Two Speed, With Residual Torque Device for Disengaged Fan Speed <u>Includes</u> : FAN Nylon
12UCV	RADIATOR Aluminum, Cross Flow, Series System; 1228 SqIn Core and 648 SqIn Charge Air Cooler
12UPA	FEDERAL EMISSIONS {Navistar N9 & N10} EPA, OBD and GHG Certified for Calendar Year 2016
12VAG	AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control <u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYP	ENGINE CONTROL, REMOTE MOUNTED - No Provision Furnished for Remote Mounted Engine Control
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations
13AVR	TRANSMISSION, AUTOMATIC {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type
13WBL	TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction
13WYU	SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming
14899	SUSPENSION AIR CONTROL VALVE Pressure Release Control In Cab
14ARK	AXLE, REAR, SINGLE {Meritor RS-23-161} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential . Gear Ratio: 6.14 <u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle

Notes

: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

<u>Code</u>	<u>Description</u>
15SPS	FUEL TANK Top Draw; D-Style, Non-Polished Aluminum, 19.0" Tank Depth, 70 U.S. Gal., 265 L, Capacity; with Quick Connect Outlet, Mounted Left Side BOC, 6" Above Frame Rail
15WDG	DEF TANK 7 U.S. Gal. 26.5L Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional
	<u>Includes</u>
	: ARM REST (2) Molded Plastic; One Each Door
	: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window
	: CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel
	: DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted
	: GLASS, ALL WINDOWS Tinted
	: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side
	: GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side
	: INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color
	: STEP (4) Two Steps Per Door
16HBA	GAUGE CLUSTER English With English Electronic Speedometer
	<u>Includes</u>
	: GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level
	: ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout
	: WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16HLJ	GAUGE, DEF FLUID LEVEL
16JNV	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Cloth, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust
	<u>Includes</u>
	: SEAT BELT 3-Point, Lap and Shoulder Belt Type
16SDE	MIRROR, CONVEX, LOOK DOWN {Lang Mekra} Right Side; 6" x 10 1/4"
16SMM	SEAT, PASSENGER {National} Non Suspension, High Back, Fixed Back, Integral Headrest, Cloth
16SNB	MIRRORS (2) {Lang Mekra} Rectangular, Thermostatically Controlled Heated Heads, Black Heads, Brackets and Arms, Breakaway Type, 7.55" x 14.1" Integral Convex Both Sides, 102" Inside Spacing
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster
	<u>Includes</u>
	: HEATER HOSES Premium
	: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps
	: REFRIGERANT Hydrofluorocarbon HFC-134A
16WJS	INSTRUMENT PANEL Center Section, Flat Panel

<u>Code</u>	<u>Description</u>
	: CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CAB SOUND INSULATION Includes Dash and Engine Cover Insulators : CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights : COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side : DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors : FLOOR COVERING Rubber, Black : GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors : SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side
16WSK	CAB REAR SUSPENSION Air Bag Type
16XWJ	WINDSHIELD WIPER BLADES Snow Type
27DMW	WHEELS, FRONT DISC; 22.5x9.00 Rims, Painted Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
	<u>Includes</u> : PAINT IDENTITY, FRONT WHEELS White
	<u>Notes</u> : Compatible Tire Sizes: 12R22.5, 295/75R22.5, 295/80R22.5, 315/80R22.5
28DRN	WHEELS, REAR {Accuride} DUAL DISC; 22.5x8.25 Rims, Painted Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
	<u>Includes</u> : PAINT IDENTITY, REAR WHEELS White
	<u>Notes</u> : COMPATIBLE TIRE SIZES: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5
7382130162	(4) TIRE, REAR 11R22.5 Load Range H UNISTEEL G177 (GOODYEAR), 493 rev/mile, 68 MPH, Drive
7782548109	(2) TIRE, FRONT 315/80R22.5 Load Range L G289 WHA (GOODYEAR), 484 rev/mile, 68 MPH, All-Position
	Services Section:
40118	WARRANTY Standard for Paystar 5000, and Workstar 7500/7600, Effective with Vehicles Built January 2, 2015 or Later, CTS-2003Z
1	Monroe Truck Equipment

INTERNATIONAL®

Financial Summary
2017 7500 SFA 4X2 (SA537)

October 24, 2016

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Factory List Prices:		
Product Items	\$132,141.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$132,141.00
Freight Charge	\$2,780.00	
Total Freight:		\$2,780.00
Total Factory List Price Including Freight:		\$134,921.00
Less Customer Allowance:		(\$47,716.40)
Total Vehicle Price:		\$87,204.60
Total Body/Allied Equipment:		\$72,062.00
Total Sale Price:		\$159,266.60
Total Per Vehicle Sales Price:		\$159,266.60
Net Sales Price:		\$159,266.60

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name


Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

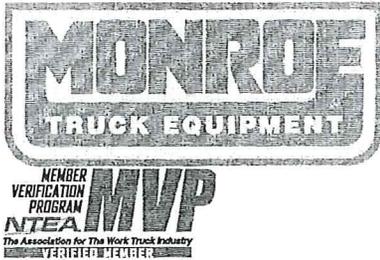

QUOTATION
 Monroe Truck Equipment
 1601 E 29th Street
 Marshfield, WI 54449
 Phone: 800-882-1900 x115
 Fax: 715-387-3952
 Email: jkatzner@monroetruck.com
www.monroetruck.com

Quote Number: 1JAK001214
 Job Order Number:
 Quote Date: 3/17/2016
 Quote valid until: 4/16/2016
 Terms: DELAYED BL
 Salesperson: SCHARTNER, TOM
 Quoted By: Julie Katzner

Customer: MEYER SALES CO, INC. (DELAYED),
 (5079200)
 600 N. 1ST ST.
 CAMERON , WI 54822

Contact: TIM
 Phone: 715-458-2838 Fax: 715-458-2862
 Email:

Dealer Code: _____
 P.O. Number: _____

REASSIGN (Required for pool units): Fleet Retail

MSO/MCO (ONLY check if legally required): MSO MCO

Accepted by: _____

Date: _____

Customer must fill out the information above before the order can be processed.

Chassis Information

Year: 2015	Make: INTERNATIONAL	Model:	Chassis Color:	Cab Type:
Single/Dual: DRW	CA:	CT:	Wheelbase:	F.O. Number #:
				Vin:

Comments: PAYMENT IS NOT DUE UNTIL SOLD

Monroe Truck Equipment, Inc. is pleased to offer the following quote for your review:

DESCRIPTION	AMOUNT
-------------	--------

11' CRYSTEEL SELECT DUMP BODY:

- 84" ID X 96" OD
- STRAIGHT STYLE FRONT
- STRAIGHT STYLE REAR
- 40" FRONT HEIGHT
- 26" SIDE HEIGHT
- 36" REAR HEIGHT
- 7 GA 1011 STEEL FRONT, SIDES, AND REAR
- 1/4" AR400 STEEL FLOOR
- AIR RELEASE TAILGATE
- GRIP STRUT WALKWAY
- 1 RUNG LADDER BELOW D/S RUBRAIL
- PLASTIC FLAPS AHEAD OF FRONT PUSHER AXLE OR DRIVE WHEELS - BODY MOUNTED
- SPRING LOADED SHOVEL HOLDER; STAINLESS STEEL
- 1/2 CABSHIELD
- GRAB HANDLE
- RIGID LADDER AT FRONT DRIVERS SIDE
- STAINLESS STEEL REAR PILLARS AND APRON
- ELECTRIC BACKUP ALARM 97DB

HOIST PACKAGE:

- ROLLER COMBO HOIST
- SCISSORS STYLE
- DOUBLE ACTING
- SUBFRAME MOUNTED

DESCRIPTION**AMOUNT**

- DUAL COMPRESSION TRIP SPRING ASSEMBLIES
- 4" X 4" X 3/8" CROSS-TUBE SUPPORT
- 3-1/2" X 3-1/2" X 1/2" SEMI-CIRCLE
- (2) 3" X 10" DOUBLE ACTING POWER REVERSE CYLINDERS WITH CUSHION VALVE
- BUILT-IN MONROE LEVEL LIFT ASSEMBLY
- MOLDBOARD AND PUSHFRAME 100% CONTINUOUSLY WELDED
- MOLDBOARD POWDER COATED RED
- PUSH FRAME POWDER COATED BLACK
- SCREW ADJUSTABLE PARKING JACK
- 18" RUBBER SNOW DEFLECTOR
- BOXED BOTTOM ANGLE
- 36" MARKERS
- QCP LOOP PLOW PORTION HITCH

8' JR REAR WING WITH PARAGLIDE:

- FRONT PARAGLIDE POST U.S. PATENT 8,596,376 (APPLICATION NO. 12/804,948)
- 27" INTAKE HEIGHT 28" DISCHARGE HEIGHT
- TWO DOUBLE ACTING CYLINDERS
- MOLDBOARD POWDER COATED RED
- 10 GA MOLDBOARD
- MOUNTING HARDWARE POWDER COATED BLACK
- WING CHECK VALVE FOR HEEL AND TOE
- D-CELL CYLINDER ILO STD CYLINDER
- MARKERS

MONROE MS969 UNDER-TAILGATE SPREADER:

- DIRECT DRIVE SPREADER (MS969-OW/DD-DD)
- 201 BARE STAINLESS STEEL (NOT PAINTED)
- 9" DIA. AUGER W/ ONE-WAY FLIGHTING FOR LEFT OR RIGHT DISCHARGE
- 7 GA., 96" TROUGH W/ 1/4" END PLATES
- ONE-PIECE, REMOVABLE & HINGED, COMBINATION COVER & REAR PANEL
- HEAVY-DUTY, STEEL ROD, CAPTIVE LATCHES
- QUICK DETACH MOUNTING BRACKETS
- STAINLESS SPINNER ASSEMBLY W/O RODS; POLY SPINNER DISC
- TAILGATE SHIELDS
- INSTALLED

MONROE FMB 12' FOLDING MOLDBOARD UNDERBODY SCRAPER:**STANDARD EQUIPMENT:**

- 2 PIECE MOLDBOARD; 1/2" X 10" UPPER; 3/4" X 9" LOWER
- 1" X 10" HANGER BOARD
- 5" CENTER PIN
- (4) HEAVY DUTY LONG TRAVEL SPRING ASSEMBLIES
- (2) 3" ACTUATING CYLINDERS
- 1" SOLID CIRCLE
- 4" POWER REVERSING CYLINDER
- POWDER COATED BLACK
- STEP INSTALLED ON DRIVER'S SIDE OF SCRAPER
- INSTALLED

HYDRAULICS PACKAGE:

- PUMP: FRONT MOUNT LOAD SENSE: 6.0 CID
- TANK: 30 GALLON SLIM-LINE STAINLESS STEEL
- ENCLOSURE: STAINLESS STEEL
- SHUT-OFF VALVE
- MORSE CABLES AND CONTROLS
- FORCE AMERICA 5100EX SPREADER CONTROL

CONTROLS:

- D/A HOIST
- D/A PLOW LIFT
- D/A PLOW ANGLE
- D/A PLOW TIRE

DESCRIPTION**AMOUNT**

Quote Total: \$72,062.00

Additional Options:**DESCRIPTION****AMOUNT****ADD TO QUOTE**

15-BANK GREASE LINE EXTENSION

ADD \$419.00

Yes / No

Notes:

- ◆ Terms are Due Upon Receipt unless prior credit arrangements are made at the time of order.
- ◆ Please note if chassis is furnished, it is as a convenience and terms are Net Due on Receipt of Chassis.
- ◆ State and Federal taxes will be added where applicable.
- ◆ Restocking fees may be applicable for cancelled orders.